


Image Scanner

# RICOH fi-7480

## Datasheet

☑ Scanner

**RICOH**  
imagine. change.

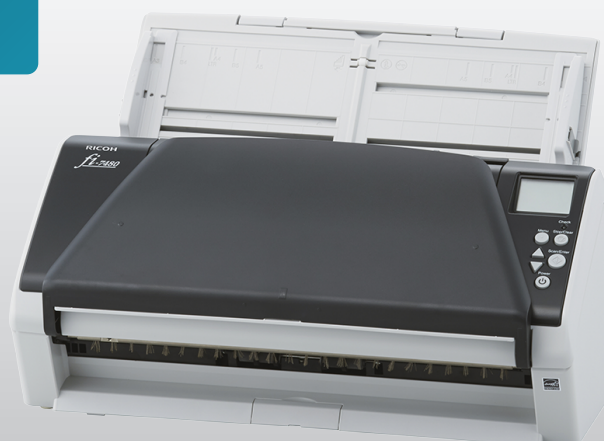

## The most compact A3 scanner that reliably handles mixed batches and large sizes

The fi-7480 scans A4 landscape documents at 80 ppm/160 ipm (200/300 dpi).

### Assistance for safe and reliable scanning

The fi-7480 possesses diverse stable paper feeding mechanisms, with its brake rollers functioning as its fundamental mechanism to separate each scanned document. Minimize risk of document damage with stable paper feeding that Paper Protection function provides through its detection of anomalies in sound and monitoring of paper feed distance. And bid farewell to missing edges with the scanner's Skew Reducer mechanism. Potential information loss, resulting from multiple sheets being fed through the scanner at once, is also no longer an issue with Ultrasonic Multi-feed detection.

### Boosted workflow with various functions

The scanner is capable of scanning a wide variation of documents: A8 to A3 documents and plastic cards as well as thick folded A2 documents, drawings folded in half, multi-layered receipts, and envelopes by switching between Manual/Single mode. Load documents with ease and reduce your workload before and after scanning, with the scanner's

independent side guides helping you align edges of variously sized documents. Keep track of scanner operations and scan up to 50 previously registered jobs, using the LCD operation panels. The Stacking Control function, a key stable paper feeding mechanism, also assists in controlling paper output speed and makes sure that documents are ejected neatly. Operation of all these functions is fairly simple and ensures users with efficient workflow assistance.

### Advanced software for maximized efficiency

Bypass the inconvenience of making fine adjustments to OCR settings with the PaperStream IP scanner driver, supporting both TWAIN and ISIS. The software automatically converts scanned images into exceptionally clean images, supporting OCR accuracy even when scanning documents with background patterns or wrinkled and soiled documents. Seamlessly linked to PaperStream IP, PaperStream Capture effectively and efficiently feeds information into your organization workflow with its various batch scanning capture features. Automatically utilizing data extracted from barcodes and patch codes, the software also determines your preferred saving destinations and eliminates time allocated to routine tasks.

Technical Information

|  |  |
|--|--|
| Scanner Type   | ADF (Automatic Document Feeder) / Manual Feed, Duplex  |
| Scanning Speed* <sup>1</sup><br>(A4 Landscape)<br>(Colour* <sup>2</sup> /Grayscale* <sup>2</sup> /<br>Monochrome* <sup>3</sup> ) | Simplex: 80 ppm (200/300 dpi)<br>Duplex : 160 ipm (200/300 dpi)                                  |
| Scanning Speed* <sup>1</sup><br>(A4 Portrait)<br>(Colour* <sup>2</sup> /Grayscale* <sup>2</sup> /<br>Monochrome* <sup>3</sup> )  | Simplex: 65 ppm (200/300 dpi)<br>Duplex : 130 ipm (200/300 dpi)                                  |
| Image Sensor Type  | Colour CCD x 2 (front x 1, back x 1)   |
| Light Source   | White LED Array x 4 (front x 2, back x 2)  |
| Optical Resolution   | 600 dpi  |
| Output Resolution* <sup>4</sup><br>(Colour / Grayscale / Monochrome)   | 50 to 600 dpi (adjustable by 1 dpi increments), 1,200 dpi (driver)* <sup>5</sup>                 |
| Output Format  | Colour: 24-bit, Grayscale: 8-bit, Monochrome: 1-bit  |
| Background Colours   | White / Black (selectable)   |
| Document Size  |  |
| Maximum  | 304.8 x 431.8 mm (12 x 17 in.)   |
| Minimum  | 50.8 x 69 mm (2 x 2.7 in.) (Portrait)  |
| Long Page Scanning* <sup>6</sup>   | 5,588 mm (220 in.)   |
| Paper Weight (Thickness)   |  |
| Paper  | 27 to 413 g/m <sup>2</sup> (7.2 to 110 lb)<br>A8 size: 127 to 209 g/m <sup>2</sup> (34 to 56 lb) |
| Plastic Card   | Up to 1.4 mm* <sup>7</sup>   |
| ADF Capacity* <sup>8</sup>   | 100 sheets (A4 80 g/m <sup>2</sup> or Letter 20 lb)  |
| Expected Daily Volume* <sup>9</sup>  | 24,000 sheets  |
| Multifeed Detection  | Overlap detection (Ultrasonic sensor), Length detection  |
| Paper Protection   | Lag detection, Sound detection (iSOP)* <sup>10</sup>   |
| Interface  | USB 3.0 / USB 2.0 / USB 1.1  |
| Power Requirements   | AC 100 to 240 V ±10 %  |
| Power Consumption  |  |
| Operating Mode   | 43 W or less   |
| Sleep Mode   | 1.4 W or less  |
| Auto Standby (Off) Mode  | 0.3 W or less  |

|   |  |
|---|--|
| Operating Environment                                 |  |
| Temperature   | 5 to 35 °C (41 to 95 °F)   |
| Relative Humidity                                     | 20 to 80% (non-condensing)   |
| Environmental Compliance                              | ENERGY STAR®, RoHS   |
| Dimensions* <sup>11</sup><br>(Width x Depth x Height) | 380 x 209 x 168 mm (15.0 x 8.2 x 6.6 in.)  |
| Weight  | 7.6 kg (16 lb)   |
| Supported Operating System                            | Windows® 11* <sup>12</sup> , Windows® 10* <sup>12</sup> , Windows Server® 2022, Windows Server® 2019, Windows Server® 2016, Windows Server® 2012 R2, Windows Server® 2012, Linux (Ubuntu)  |
| Software / Drivers                                    | PaperStream IP Driver (TWAIN/TWAIN x64/ISIS), WIA Driver* <sup>13</sup> , Image Scanner Driver for Linux (SANE)* <sup>13*14</sup> , PaperStream Capture, PaperStream ClickScan* <sup>14</sup> , Software Operation Panel, Error Recovery Guide, ABBYY FineReader for ScanSnap™* <sup>14</sup> , Scanner Central Admin Server   |
| Image Processing Functions                            | Multi image output, Automatic colour detection, Blank page detection, Dynamic threshold (iDTC), Advanced DTC, SDTC, Error diffusion, Dither, De-Screen, Emphasis, Dropout colour (None/Red/Green/Blue/White/Saturation/Custom), sRGB output, Hole punch removal, Index tab cropping, Split image, De-Skew, Edge correction, Vertical streaks reduction, Cropping, Static threshold |
| Included Items  | ADF paper chute, AC cable, AC adapter, USB cable, Setup DVD-ROM  |

Options

|                                      |              |                                |
|--------------------------------------|--------------|--------------------------------|
| Post Imprinter (FI-748PRB)           | PA03710-D401 | Back-side printing on document |
| PaperStream Capture Pro Departmental | PSCP-DP-0001 | 1 license per PC.              |

Consumables

|                 |              |  |
|-----------------|--------------|--|
| Brake Roller    | PA03710-0001 | Every 200,000 sheets or one year                               |
| Pick Roller     | PA03670-0002 | Every 200,000 sheets or one year                               |
| Print Cartridge | CA00050-0262 | 4,000,000 printed characters or 6 months after opening the bag |

\*<sup>1</sup> Scanning speeds may vary due to the system environment. For details, please visit our website at: <https://www.pfu.ricoh.com/global/scanners/fi/>. \*<sup>2</sup> Indicated speeds are from using JPEG compression. \*<sup>3</sup> Indicated speeds are from using TIFF CCITT Group 4 compression. \*<sup>4</sup> Selectable maximum resolution may vary depending on the length of the scanned document. \*<sup>5</sup> Limitations may apply to the size of documents that can be scanned, depending on system environment, when scanning at high resolution (over 600 dpi). \*<sup>6</sup> Capable of scanning documents longer than A3 (297 x 420 mm / 11.7 x 16.5 in.) sizes. When using PaperStream IP (TWAIN/ISIS) to scan at 200 dpi, the maximum scanning length is 5,588 mm (220 in.). \*<sup>7</sup> Capable of scanning up to 3 cards at a time. (Note: does not set more than one embossed card at a time.) \*<sup>8</sup> Maximum capacity depends on paper weight and may vary. \*<sup>9</sup> Numbers are calculated using scanning speeds and typical hours of scanner use, and are not meant to guarantee daily volume or unit durability. \*<sup>10</sup> Intelligent Sonic Paper Protection. \*<sup>11</sup> Excludes the ADF paper chute and Stacker. \*<sup>12</sup> fi Series scanners do not run with Windows® 11 and 10 ARM-based PCs. \*<sup>13</sup> Functions equivalent to those offered by PaperStream IP may not be available with the Image Scanner Driver for Linux or WIA Driver. \*<sup>14</sup> Refer to the fi Series Support Site for driver/software downloads and full lineup of all supported operating system versions.

Trademarks

ABBYY™ FineReader™ Engine © ABBYY. OCR by ABBYY. ABBYY and FineReader are trademarks of ABBYY Software, Ltd. which may be registered in some jurisdictions. ISIS is a trademark of Open Text. Microsoft, Windows, and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Linux is the registered trademark of Linus Torvalds in the U.S. and other countries. Any other products or company names appearing in this document are the trademarks or registered trademarks of the respective companies.

Safety Precautions

Be sure to carefully read all safety precautions prior to using this product and use this device as instructed. Do not place this device in wet, moist, steamy, dusty or oily areas. Using this product under such conditions may result in electrical shock, fire or damage to this product. Be sure to limit the use of this product to listed power ratings.

ENERGY STAR®

PFU Limited has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR® is a registered trademark of the United States.

PFU Canada Inc.

<https://www.pfu-ca.ricoh.com>

Have a question? Email us at: [sales@pfu-ca.ricoh.com](mailto:sales@pfu-ca.ricoh.com)

RICOH and RICOH logo are registered trademarks of Ricoh Co., Ltd. Other product names are the trademarks or registered trademarks of the respective companies.

Specifications are subject to change without notice. Visit the fi Series website for more information. <https://www.pfu-ca.ricoh.com/scanners> © 2024 PFU Canada Inc. All rights reserved.